



Instructions KRX Plastic Roof 2 Seat

Read through all instructions before install.

Tube Clamps 1-3/4" (Black) – 2

1/4"-20 Lock Nuts (SS) – 8

Tube Clamps 1-1/2" (Black) – 2


1/4" Flat Washers (BSS) – 16

1/4"-20 x 1-1/4" Bolts (BSS) – 8

Adhesive Foam – 156"

STEP ONE – Put the adhesive foam on the roof where the roof will rest on the cage.

STEP TWO – Place the bigger tube clamps on the sides of the cage and the smaller clamps on the front and back crossbars.

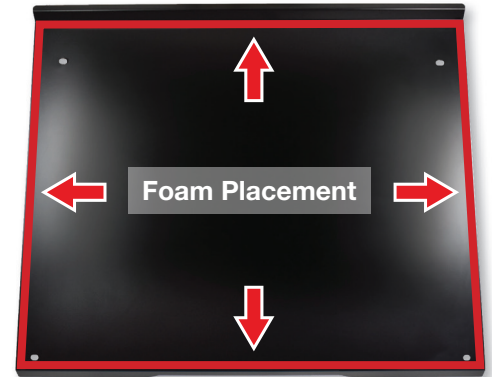

STEP THREE – Set the roof on the cage. Bolt the roof to the cage and then the clamps. Use a washer on both sides of the bolts.