




# Instructions Yamaha RMAX Glass Windshield

## HARDWARE LIST

- 4 – Universal Billet Clamp 2.0"
- 4 – Bolt ¼-20 × 2.5"
- 4 – Flat Washer 1/4"
- 4 – Lock Washer
- 8 – Bolt 10/24 × 1/2"
- 8 – Lock Nut 10/24
- 1 – Right Handle Assembly
- 1 – Left Handle Assembly

## TOOL LIST


- Hex tool 1/8" (Handle Assembly)
- Hex tool 5/32" (clamp bolts)

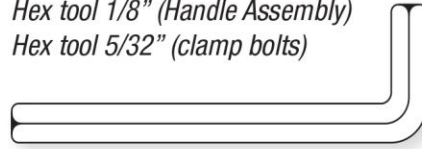



- Wrench 3/8" (Handle Assembly)



- Torx T27 Tool (RMAX Roof)

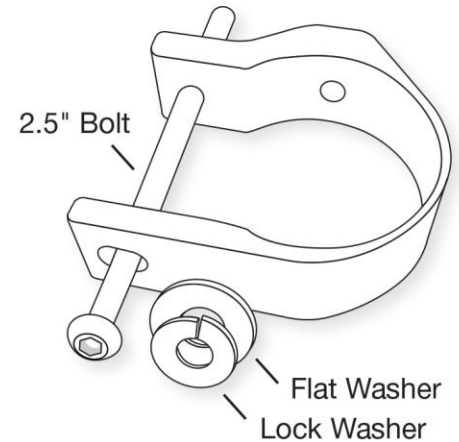

**STEP ONE** – Using the Handle Assembly bolt the Flap Mount on the inside of the polycarbonate as seen in the picture using 2 10-24 bolts and lock nuts. Tighten bolts. Mount the bracket with threaded insert on the right two holes of bottom brace using the other two 10-24 bolts and nuts.

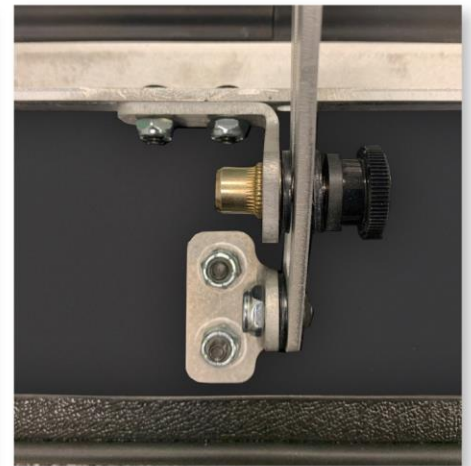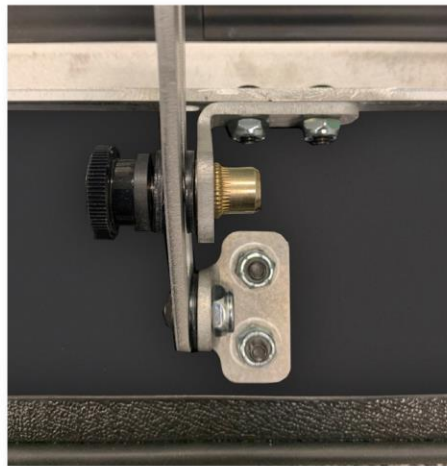

**STEP TWO** – Place the billet clamps on the frame with the clamp orientation shown in the picture. The flat face of the clamp should face forward and the clamp opening pointed towards the center of the machine. Use a 2.5" bolt with a lock washer and a flat washer to secure windshield to clamps. Adjust windshield to desired location and then tighten all the bolts. **Do not over-tighten** the bolts causing the frame to distort it could cause the glass to break during a ride.



**YOUTUBE** – Use your camera to scan the QR code for the RMAX Glass Windshield Installation video.