



RZR Trail / Trail S Aluminum Roof Install Instructions

Hardware

SKU: ZL-RZTRL-RF-2-AL Fits: 2021 – 2022 RZR Trail /Trail S


4 – 1/4" X 3/4" Bolts

8 – 1/4" Flat Washers

4 – 1/4" Locknuts

11 ft. – 1/2" X 3/8" Edge Foam

STEP 1. Remove backing from adhesive foam and apply the foam on the bottom of the roof where the red lines are on image. The foam should be close to the side edges, and the rear piece should be where the rear cross bar on the cage is. To find this location, place roof on the cage and mark with masking tape where the rear cage bar is for reference.

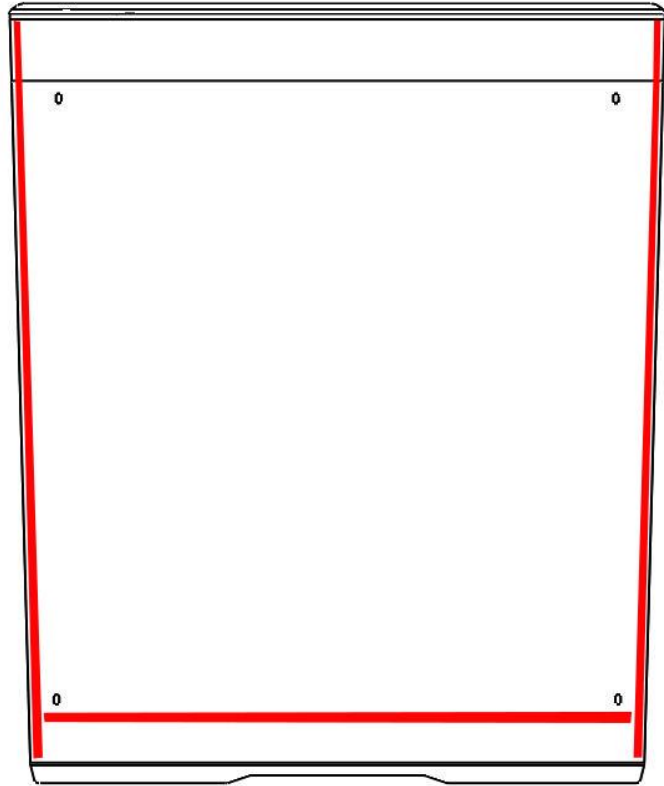

STEP 2. Place the roof on the top of the cage lining up each hole. Start the 3/4" bolts with washers and nuts in each available hole. Beginning tightening the bolts starting at the back making sure to keep the roof centered.